

REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				07-16-13	

**ELECTRICAL PROPERTIES:**

1. IMPEDANCE : 50Ω Nominal


2. CABLE : INSERTION LOSS < 1.5dB @ DC~6GHz

**包裝方式**

1. 100cs / 夾鏈袋包裝。

1000pcs/ PE袋包裝+機封蓋者, 為品管檢驗之尺寸

ROHS COMPLIANT

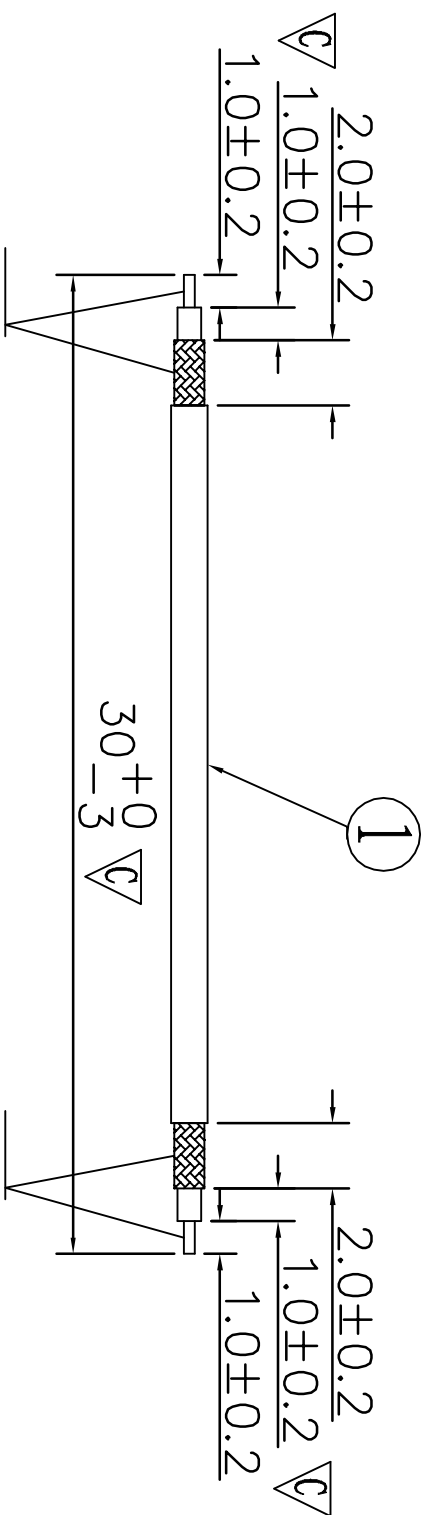

芯線&編織鍍錫

芯線&編織鍍錫

No.	Description	Specification	Qty	Notes
1	COAXIAL CABLE	OD=1.13 COLOR=黑	1	

TOLERANCE UNSPECIFIED: X. ±0.50 X.X ±0.25 XXX ±0.15 XXXX ±0.05 X.X' ±2' XX' ±1'		<b>DISNT</b> 得升電子股份有限公司 DISNT MECHANICAL ELECTRONIC CO., LTD	
PROJECTION: 	CHECKED BY: 何智权 DATE: 7-16-13	DRAWN BY: 杨熊 DATE: 7-16-13	TITLE: 成品规格圖 PART NAME: RF CABLE 0D1.13 L30MM
UNIT: mm [inch] SCALE: 1:1	APPROVED BY: 陈宗渊 DATE: 7-16-13	DATE: 7-16-13	PART NO.: T-DRF0001B-30 MOLD NO.: DRAW NO.: T-DRF0001B-30 SHEET: 1 OF 1